


DIP (0.4"/0.5"/0.6" width, 0.1" pitch) to SOIC-Wide Header (1.27mm Pitch, for 300 mil IC body)

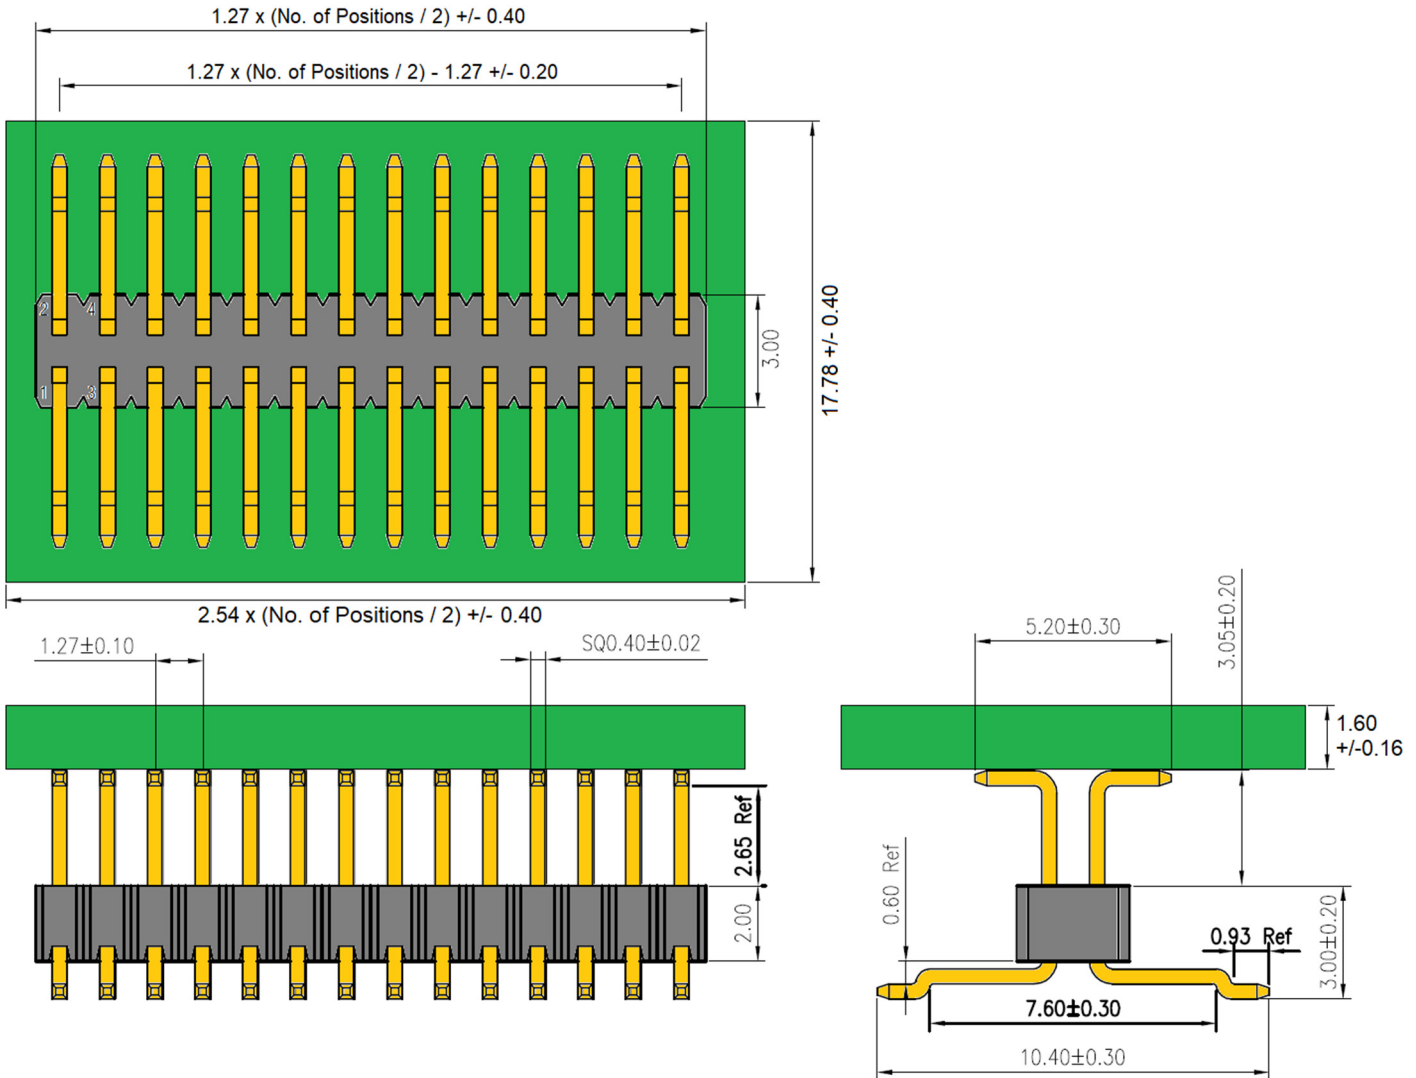


SPECIFICATIONS

PCB construction:	FR-4 UL94V-0
Plastic body construction:	PA6T plastic (320°C melting point)
Pin construction:	Gold plated (brass pin, with 1um gold over 50um nickel)
Operating temperature range:	-40°C to +130°C
Reflow maximum temperature:	+260°C
Current rating:	1.0 Amp / contact
Contact resistance:	≤ 20 mΩ / contact
Insulation resistance:	≥ 500 MΩ (at V = 100V)
Withstanding voltage:	300 V AC / minute


AVAILABLE PART NUMBERS

Orderable Part Number	Total Pin Count	Pin Arrangement
DIP600-SOIC-08W	8	2x4
DIP600-SOIC-10W	10	2x5
DIP600-SOIC-12W	12	2x6
DIP600-SOIC-14W	14	2x7
DIP600-SOIC-16W	16	2x8
DIP600-SOIC-18W	18	2x9
DIP600-SOIC-20W	20	2x10
DIP600-SOIC-22W	22	2x11
DIP600-SOIC-24W	24	2x12
DIP600-SOIC-26W	26	2x13
DIP600-SOIC-28W	28	2x14
DIP600-SOIC-80W	80	2x40


PART PHOTOS




DIP600-SOIC-08W




DIP600-SOIC-10W



DIP600-SOIC-12W



DIP600-SOIC-14W



DIP600-SOIC-16W



DIP600-SOIC-18W



DIP600-SOIC-20W



DIP600-SOIC-22W



DIP600-SOIC-24W



DIP600-SOIC-26W



DIP600-SOIC-28W