Datasheet revision 1.0

www.Proto-Advantage.com

MSOP-10 Socket to DIP-10 Adapter (3 mm body, 0.5 mm pitch)

Product Highlights

RoHS Compliant Comes fully assembled Immersion Gold PCB Finish Gold plated DIP pins

Specifications

Top-side socket type: PCB construction:

PCB operating temperature range:

PCB reflow maximum temperature:

PCB Assembly standard:

Bottom Side DIP pin spacing:

Proto-Advantage PA-SOCKET-MSOP-10-0.5 FR-4 UL94V-0

-40°C to +130°C

+260°C

IPC-A-610 Class II

0.1" (2.54mm) pitch, 0.3" (7.62mm) row-to-row

Product Images



Image 1: Top View of Socket Adapter



Image 2: Bottom View of Socket Adapter

Top Side Socket Drawing

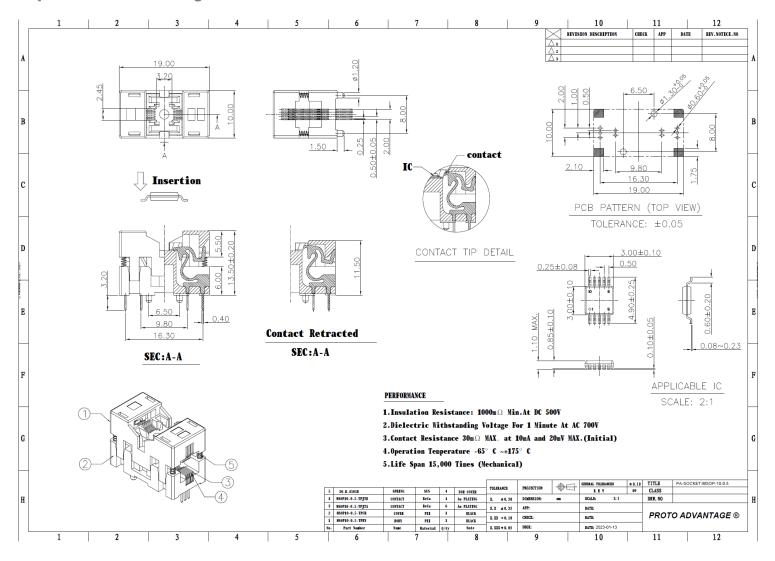


Image 3: Proto-Advantage PA-SOCKET-MSOP-10-0.5 Socket Drawing